

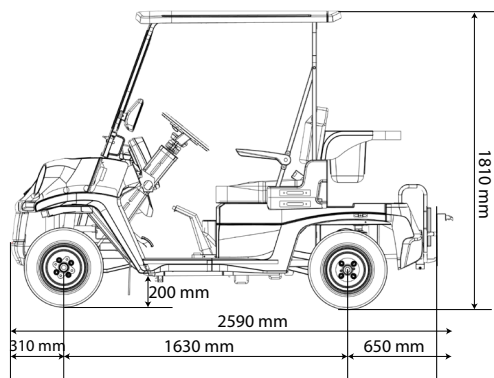


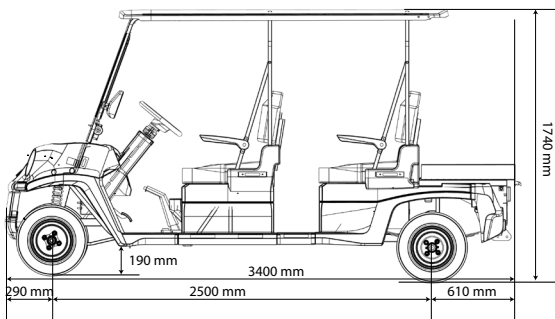

**N.20 Passenger 2 H**

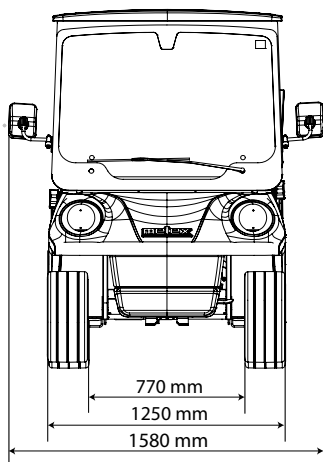

**N.20 Passenger 4 Long H**

|                         | PASSENGER 2 H                        | PASSENGER 4 LONG H                   |
|-------------------------|--------------------------------------|--------------------------------------|
| <b>MOTOR</b>            | 48V 3-phase AC                       | 48V 3-phase AC                       |
| <b>NOMINAL POWER</b>    | 5,0 kW                               | 5,0 kW                               |
| <b>PEAK POWER</b>       | 11,5 kW                              | 11,5 kW                              |
| <b>MAX TORQUE</b>       | 75 Nm                                | 75 Nm                                |
| <b>MOTOR CONTROLLER</b> | 350A                                 | 350A                                 |
| <b>CHASSIS</b>          | Hot dip galvanized steel frame       | Hot dip galvanized steel frame       |
| <b>BRAKES</b>           | Hydraulic drum brakes                | Hydraulic drum brakes                |
| <b>SUSPENSIONS</b>      | Double wishbone (F) - Leaf spring(R) | Double wishbone (F) - Leaf spring(R) |
| <b>TIRES</b>            | 205/50 R10                           | 195/55 R10                           |

### PERFORMANCE

|                  |         |
|------------------|---------|
| <b>TOP SPEED</b> | 33 km/h |
|------------------|---------|

### MASS

|                                                        |        |        |
|--------------------------------------------------------|--------|--------|
| <b>VEHICLE WEIGHT</b><br>(without battery and options) | 400 kg | 450 kg |
|--------------------------------------------------------|--------|--------|

### DIMENSIONS

|                                          |                   |                   |
|------------------------------------------|-------------------|-------------------|
| <b>LENGTH</b>                            | 2590 mm           | 3400 mm           |
| <b>WIDTH</b><br>(without / with mirrors) | 1250 mm / 1580 mm | 1250 mm / 1580 mm |
| <b>HEIGHT</b>                            | 1810 mm           | 1740 mm           |
| <b>WHEELBASE</b>                         | 1630 mm           | 2500 mm           |
| <b>OUTER TURNING RADIUS</b>              | 3350 mm           | 4600 mm           |

### STANDARD FEATURES

**P2 H:** Golf bag holder, 5,0 kW AC motor, water filling system, on-board diagnostics, 48V on-board battery charger, LED front & rear lights, 12V output, 10" wheels, windshield with wipers, hydraulic drum brakes, 3-point seat belts

**P4L H:** 5,0 kW AC motor, water filling system for Flood Lead Acid (FLA) batteries, on-board diagnostics, 48V on-board battery charger, LED front & rear lights, 12V output, 10" wheels, windshield with wipers, hydraulic drum brakes, 3-point seat belts

### OPTIONAL FEATURES

**P2 H:** Ball washer, sand bottle, cooler, heated front windshield, FM or DAB radio with Bluetooth, profiled seats, closed glove compartment, forward drive warning sound

**P4L H:** Heated front windshield, FM or DAB radio with Bluetooth, profiled seats, closed glove compartment, forward drive warning sound

| BATTERY            | P2 H       | P4L H           |            |         |         |          |
|--------------------|------------|-----------------|------------|---------|---------|----------|
|                    | FLA        | FLA             | FLA        | LI-ION  | LI-ION  | LI-ION   |
| <b>CAPACITY</b>    | 170Ah std. | T125 240Ah std. | T145 260Ah | 6,2 kWh | 9,3 kWh | 12,4 kWh |
| <b>VOLTAGE</b>     | 48 V       | 48 V            | 48 V       | 48 V    | 48 V    | 48 V     |
| <b>WEIGHT</b>      | 220 kg     | 240 kg          | 270 kg     | 38 kg   | 57 kg   | 76 kg    |
| <b>CHARGE TIME</b> | ~11 h      | ~11 h           | ~11 h      | ~4,5 h  | ~6,5 h  | ~9,5 h   |