
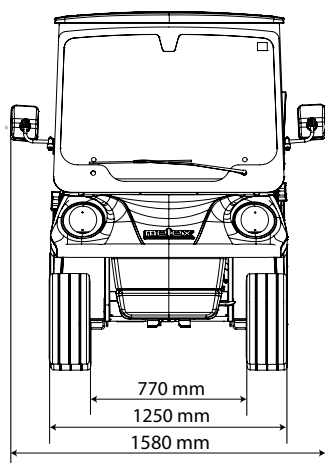


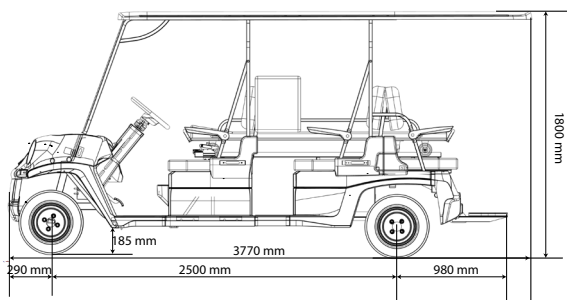

	AMBULANCE
MOTOR	48V 3-phase AC
NOMINAL POWER	5,0 kW
PEAK POWER	11,5 kW
MAX TORQUE	75 Nm
MOTOR CONTROLLER	350A
CHASSIS	Hot dip galvanized steel frame
BRAKES	Hydraulic drum brakes
SUSPENSIONS	Double wishbone (F) - Leaf spring(R)
TIRES	195/55 R10

PERFORMANCE

TOP SPEED	33 km/h
------------------	---------

MASS

VEHICLE WEIGHT (without battery and options)	545 kg
--	--------

DIMENSIONS

LENGTH	3770 mm
WIDTH (without / with mirrors)	1250 mm / 1580 mm
HEIGHT	1800 mm
WHEELBASE	2500 mm
OUTER TURNING RADIUS	4600 mm

STANDARD FEATURES

3 seats and stretchers on wheels, defibrillator holder, IV pole holder water filling system for Flood Lead Acid (FLA) batteries, 5,0 kW AC motor, 48V on-board battery charger, LED front & rear lights, 12V output, 10" wheels, windshield with wipers, hydraulic drum brakes, 3-point seat belts

OPTIONAL FEATURES

Certified stretcher, oxygen bottle holder, orange/blue light bar, heated front windshield, FM or DAB radio with Bluetooth, profiled seats, reverse camera, closed glove compartment, forward drive warning sound, bumper

BATTERY	FLA		LI-ION		
CAPACITY	T125 240Ah std.	T145 260Ah	6,2 kWh	9,3 kWh	12,4 kWh
VOLTAGE	48 V	48 V	48 V	48 V	48 V
WEIGHT	240 kg	270 kg	38 kg	57 kg	76 kg
CHARGE TIME	~11 h	~11 h	~4,5 h	~6,5 h	~9,5 h