
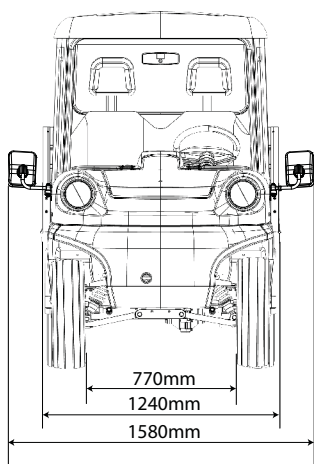


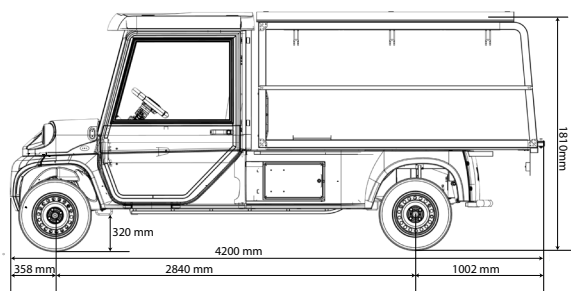

	HEARSE
MOTOR	48V 3-phase AC
NOMINAL POWER	5,0 kW / 8,0 kW
PEAK POWER	11,5 kW / 14 kW
MAX TORQUE	75 Nm / 60Nm
MOTOR CONTROLLER	350A / 450A
CHASSIS	Hot dip galvanized steel frame
BRAKES	Hydraulic brakes - disc (F) & drum (R)
SUSPENSIONS	Double wishbone (F) - Leaf spring(R)
TIRES	165 R13

PERFORMANCE

TOP SPEED	43 km/h
------------------	---------

MASS

VEHICLE WEIGHT (without battery and options)	620 kg
--	--------

DIMENSIONS

LENGTH	4020 mm
WIDTH (without / with mirrors)	1240 mm / 1580 mm
HEIGHT	1810 mm
WHEELBASE	2840 mm
OUTER TURNING RADIUS	5300 mm

STANDARD FEATURES

Electrically operated stainless steel platform, handles for wreaths, automatic electromagnetic brake, 7-inch touch screen display, on-board diagnostics, 48V on-board battery charger, steering column mounted front and reverse (D-N-R) selector switch, LED front & rear lights, 12V output + USB charging socket, windshield with wipers, 3× cupholders, 4× storage nets in cabin, 3-point seat belts

OPTIONAL FEATURES

8,0 kW drive motor, water filling system for Flood Lead Acid (FLA) batteries, doors, power steering, heated front windshield, heater – diesel or electric, FM or DAB radio with Bluetooth, profiled seats, reverse camera, forward drive warning sound or AVAS system (Acoustic Vehicle Alerting System), bumper

BATTERY	FLA	LI-ION		
CAPACITY	T145 260Ah std.	6,2 kWh	9,3 kWh	12,4 kWh
VOLTAGE	48 V	48 V	48 V	48 V
WEIGHT	240 kg	38 kg	57 kg	76 kg
CHARGE TIME	~11 h	~4,5 h	~6,5 h	~9,5 h